

Rec'd PCT/PTO 13 MAY 2005

PCT/IB 93 / 04831

28.10.03



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 10 NOV 2003

WIPO PCT

10/535056

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079808.8

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02079808.8
Demande no:

Anmeldetag:
Date of filing: 19.11.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Travelling-wave amplifier

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H03F/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Travelling-wave amplifier

EPO - DG 1

19. 11. 2002

(91)

The invention relates to a travelling-wave amplifier comprising two transmission lines, and at least two amplifiers. The invention further relates to a method for providing travelling-wave amplification and the use of such a travelling-wave amplifier or method.

5

US 5,550,513 describes a fully differential amplifier. The amplifier comprises a plurality of interconnected distributed amplifier stages, each having input means to receive a high frequency input signal. A pair of transmission lines for transferring the high frequency input signal to each of the distributed amplifier stages, is provided. The circuit also comprises a pair of output transmission lines connected to each of the distributed amplifier stages to deliver the summed, differential output to appropriate output terminals. Further biasing means are provided to supply a dc-current to the distributed amplifier stages for controlling the amplitude of the high frequency differential output. This differential amplifier comprises unbalanced transmission lines, which have a ground plane in which the return current flows.

10

15

It is therefore an object of the invention to provide an improved travelling-wave amplifier.

20

25

The object of the invention is achieved by a travelling-wave amplifier, where said amplifiers are coupled anti-parallel to said transmission lines. Thereby the travelling-wave of a first transmission line is fed to a first amplifier, said first amplifier amplifies this input signal and adds this amplified signal to the travelling-wave of said second transmission line. The travelling-wave of said second transmission line is fed to an input port of a second amplifier, said second amplifier also amplifies this signal and adds the amplified signal to the travelling-wave of said first transmission line. It is preferred that any two consecutive amplifiers are coupled anti-parallel to the transmission lines. The amplified signals are added to the signals on the transmission lines and with each amplifier the travelling-wave is amplified.

By providing such a travelling-wave amplifier, the signals are amplified, the losses on the transmission lines are compensated for, the common mode currents are reduced, input and output signals are isolated, and reflected waves may be suppressed.

5 In an embodiment, providing said coupling means, the amplifiers may be coupled electrically to the transmission lines. It is preferred that said coupling means are electrical connections or directional coupling circuits according to claims 4 or 5. The directional coupling circuits may add directivity and isolation to the travelling-wave amplifier.

10 A coupling according to claim 3 allows for easy coupling between the amplifiers and the transmission lines. As a spatial offset is allowed, design restrictions may be overcome.

15 A travelling-wave amplifier according to claim 6 is further preferred. The travelling-wave at the two transmission lines may have a phase difference of 180° . When coupling the output signal of an amplifier to the travelling-wave on an transmission line, the phase of the signals should be matched such that the amplified signal adds to the travelling-wave.

A travelling-wave amplifier according to claim 10 allows for de-coupling the amplifier with further circuits.

20 A method for providing travelling-wave amplification, in particular with a pre-described travelling-wave amplifier, with two transmission lines and at least two amplifiers, where said travelling-waves at said transmission lines have a phase difference of 180° , where the output of a pair of said amplifiers is fed to said transmission lines anti-parallel such that the travelling-wave of a first transmission line is fed to a first amplifier, said first amplifier adds an amplified signal to the travelling-wave of said second transmission line and the
25 travelling-wave of said second transmission line is fed to a second amplifier, said second amplifier adds an amplified signal to the travelling-wave of said first transmission line, is a further aspect of the invention.

30 Yet a further aspect of the invention is the use of travelling-wave amplifiers in optical systems, optical switch matrices, optical communication systems, RF wideband products, microwave communication, set-top boxes for satellite TV or satellite communication, anti-collision radar, wireless local loops, advanced IC processors such as GaAs and InP processes.

These and other aspects of the invention will be apparent from and elucidated with reference to the following figures in which:

Fig. 1 depicts a distributed travelling-wave amplifier according to the invention,

5 Fig. 2 depicts a block diagram of a standard travelling-wave amplifier according to the invention,

Fig. 3 a travelling-wave amplifier according to the invention; and

Fig. 4 a node of a travelling-wave amplifier according to the invention.

10 Fig. 1 depicts a common travelling-wave amplifier (TWA). This TWA is based on using the parasitics of a transistor as an integral part of the transmission line. By connecting several transistors 3 with suitable interconnection lines between them, a distributed or synthetic transmission line is formed. This transmission line exhibits signal
15 gain instead of signal loss.

A synthetic transmission line is formed in the gate circuit of the transistors 3 from the inductors 8a and the input impedances of the transistors 3. A synthetic drain transmission line is formed from the inductors 6a and the capacitors 6b. The inductors 6a and capacitors 6b are formed by parasitics of the transmission lines. The transmission lines are
20 terminated by their characteristic impedances 4 and 5.

An input signal is fed to the transistors from generator 2, comprising a signal generator 2b and a generator impedance 2a. For each transistor 3, the input signal propagates as a wave through a fraction of the gate line of the transistor 3 before driving the input of that transistor 3 and producing a drain current. The drain current generates a forward wave on the
25 drain line, which propagates to the output 10 with output load 10a.

The bandwidth of such a TWA is limited because of delay mismatches between the two synthetic lines. The gain-bandwidth product is constrained by the transistor power-gain cut-off frequency.

30 Depicted in Fig. 2 is a block diagram of the TWA shown in Fig. 1. The transmission lines 12, 14 are connected to the amplifiers 16, which may comprise capacitors 6b, transistors 3 and inductors 6a and 8a.

Fig. 3 depicts a block diagram of a TWA according to the invention. Depicted are transmission lines 12, 14. These transmission lines 12, 14 have inputs 12a, 14a and outputs 12b, 14b. These transmission lines 12, 14 are connected by amplifiers 16. These

amplifiers are coupled anti-parallel to the transmission lines. The output of a first amplifier 16 is coupled to transmission line 14. The output of the next amplifier 16 is coupled to transmission line 12. That means that any two consecutive amplifiers 16 are coupled to the transmission lines 12, 14 with different directivities. The inputs of the amplifiers 16 are not necessarily positioned spatially at the same place as the outputs, but may have spatial offsets 20. The inputs and outputs of the amplifiers 16 are coupled to the transmission lines 12, 14 with coupling arrangements 18, which may be simple electrical connections or directional coupling circuits, providing directivity and isolation to the TWA circuit. The travelling-waves at the transmission lines 12, 14 have phase differences of 180° . The amplified signals at the output of each amplifier 16 should be such that the signals add to the respective travelling-wave on the transmission line. The phase match is achieved by varying the offset 20, the phase of the amplifiers 16 and/or the phase of the coupling arrangements 18.

Fig. 4 depicts one amplifier 16 coupled to transmission lines 12, 14. The amplifier comprises capacitor 16a, impedance 16b, and transistor 16c. Transmission lines 12 and 14 are coupled to V_{cc} by capacitors 22b, 24b and inductors 22a, 24a. The transistor 16c receives its DC-bias from the transmission lines. With sixteen consecutive amplifiers 16 the TWA may have a gain of 11 dB with the -3dB point at 4,6 GHz, resulting in a gain-bandwidth product of 16,5 GHz. It is an intention of the invention to use frequencies up to 100 GHz or more. Especially in optical networks, the bandwidth of the signal processing has to be large, e.g. a bandwidth of 10 GHz is common. In optical networks differential transmission lines are often used, as lasers and photo diodes have differential connections. In optical switch matrices a differential transmission line may be up to 2mm long. They have to be implemented on semiconductor substrates and be able to connect many inputs and outputs, which may be achieved with a TWA according to the invention. The inventive TWA may compensate for imperfections and signal loss at the nodes of an optical switching matrix.

CLAIMS:

19. 11. 2002

(91)

1. Travelling-wave amplifier comprising two transmission lines, at least two amplifiers, said amplifiers being coupled anti-parallel to said transmission lines.

2. Travelling-wave amplifier according to claim 1, wherein coupling means are provided for coupling said amplifiers to said transmission lines, respectively.

3. Travelling-wave amplifier according to claim 1, wherein said coupling of an input port of said amplifier to one of said transmission lines is spatial by set off from the coupling of an output port of said amplifier to the other of said transmission lines.

4. Travelling-wave amplifier according to claim 2, wherein said coupling means are electrical connections.

5. Travelling-wave amplifier according to claim 2, wherein said coupling means are directional coupling circuits.

6. Travelling-wave amplifier according to claim 1, wherein the phase of the output signal of said amplifiers is matched with the phase of the travelling-wave on the respective transmission line.

7. Travelling-wave amplifier according to claim 3, wherein said spatial offset provides said phase matching.

8. Travelling-wave amplifier according to claim 1, wherein the phase of said amplifiers provides said phase matching.

9. Travelling-wave amplifier according to claim 2, wherein said coupling means provide said phase matching.

10. Travelling-wave amplifier according to claim 1, wherein said amplifiers retrieve DC-bias voltage from said transmission lines.

11. Method for providing travelling-wave amplification, in particular with a
5 travelling-wave amplifier according to claim 1, with two transmission lines and at least two amplifiers, where said travelling-waves at said transmission lines have a phase difference of 180°, where the output of a pair of said amplifiers is fed to said transmission lines anti-parallel such that the travelling-wave of a first transmission line is fed to a first amplifier, said first amplifier adds an amplified signal to the travelling-wave of said second
10 transmission line and the travelling-wave of said second transmission line is fed to a second amplifier, said second amplifier adds an amplified signal to the travelling-wave of said first transmission line.

12. Use of travelling-wave amplifiers according to claim 1 or of a method
15 according to claim 11 in optical systems, optical switch matrices, optical communication systems, RF wideband products, microwave communication, set-top boxes for satellite TV or satellite communication, anti-collision radar, wireless local loops, advanced IC processors such as GaAs and InP processes.

ABSTRACT:

19. 11. 2002

(91)

The invention relates to a travelling-wave amplifier comprising amplifiers and transmission lines. The travelling-wave amplifier provides compensation for the losses of the transmission lines, amplification of the signals and isolation between input and output by coupling the amplifiers to the transmission lines anti-parallel.

5

Fig. 3

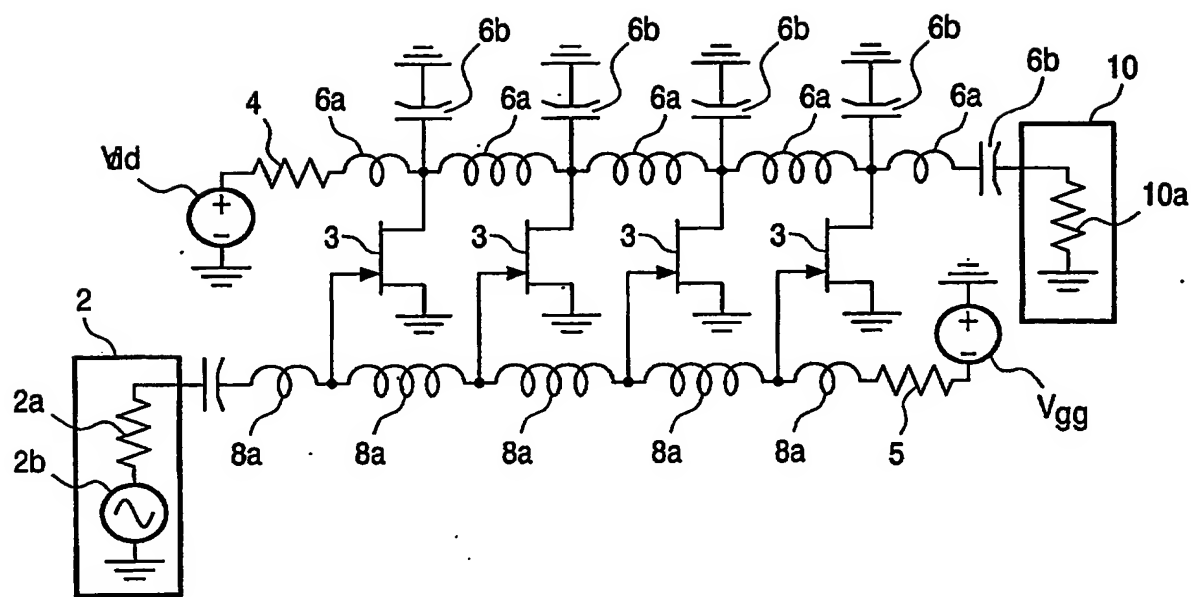


FIG. 1

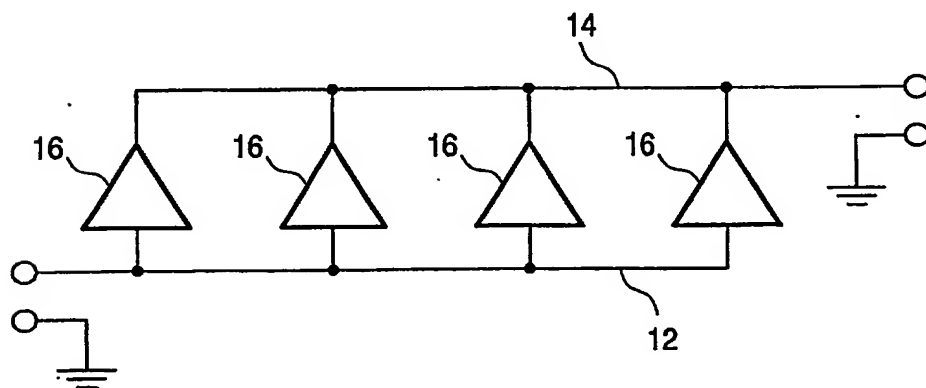


FIG. 2

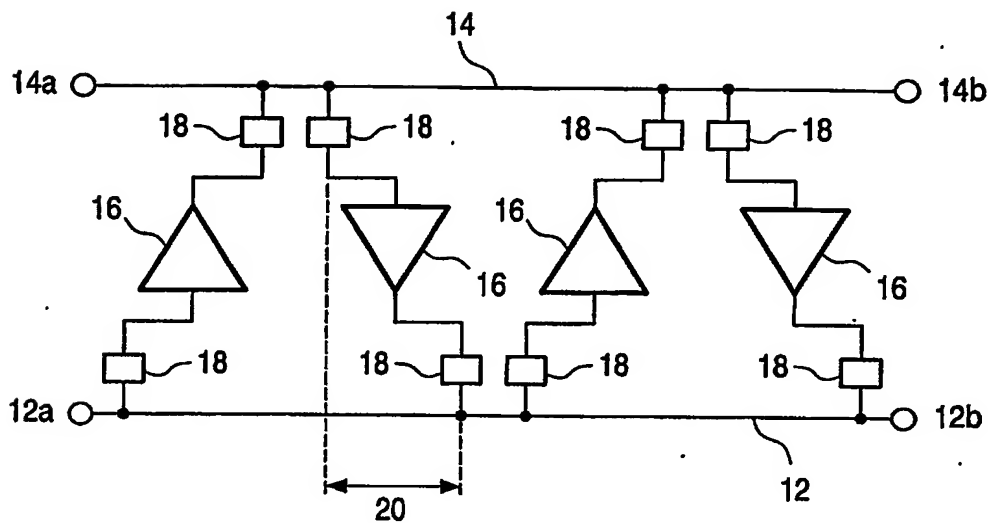


FIG. 3

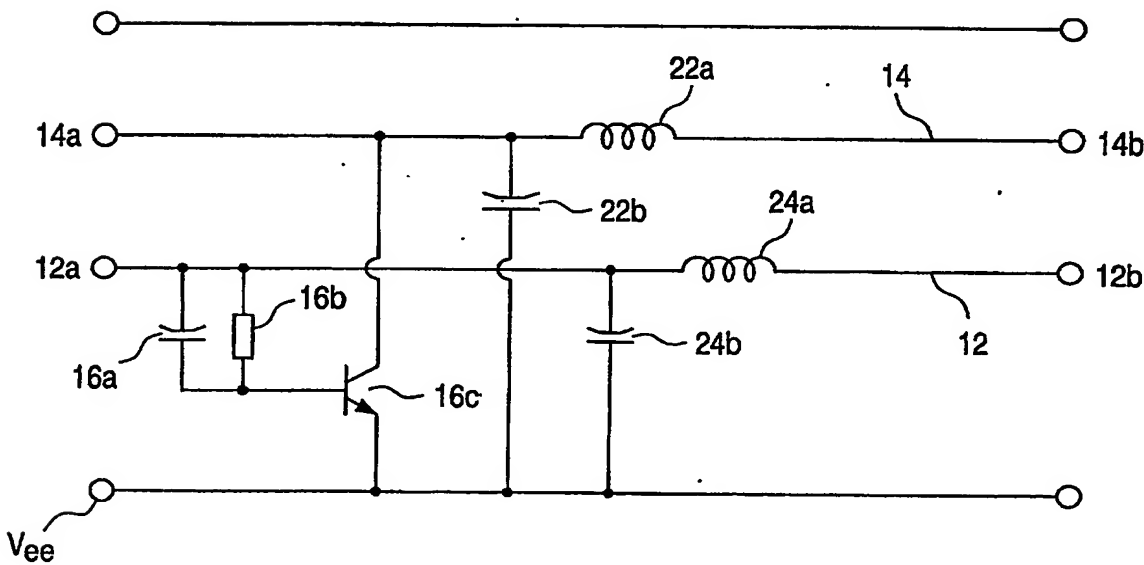


FIG. 4